


INK-JET LASER PRINTER


The economical solution for marking and printing of cables and wires



TECHNICAL HIGHLIGHTS

- Very good marking contrast thanks to freely selectable color
- Software optimally adapted to the machines
- Marking in throughfeed without loss of time
- Freely programmable display of graphics, barcodes and texts
- Self-diagnosis system with error display in plain text

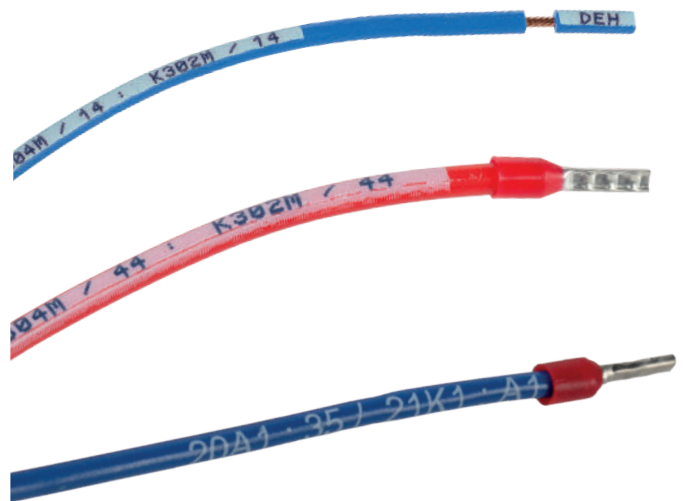

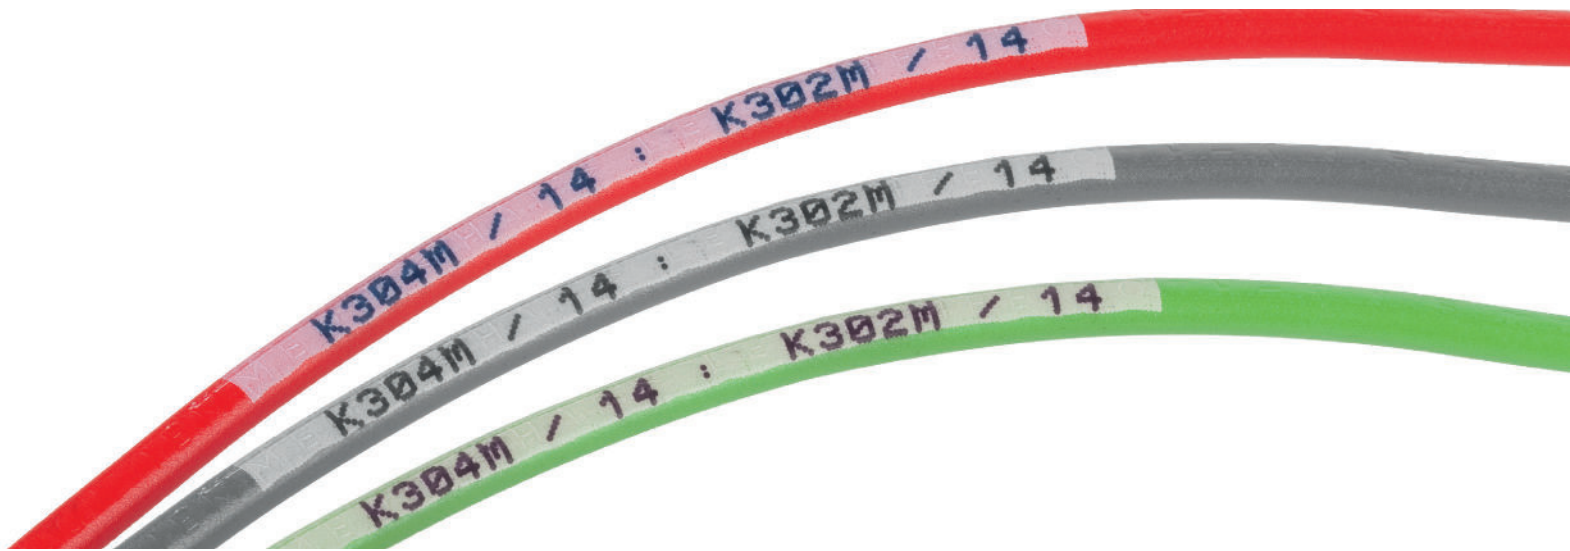

INK-JET LASER PRINTER

The Ink Jet Printer is the uncompromising and innovative result of many years of experience in the area of non-contact material labelling.

With a very high printing speed and feed speeds, the Ink Jet printer can be used in all modern high-performance production lines.

TECHNICAL DATA	Technical data	Ink-Jet Printer
	Usage	Processing of non-pigmented or lightly pigmented inks
	Printing speed	3,200 characters/sec. or 40 prints at 10 characters/sec.
	Feed speed max.	380 m/min.
	Font types	International alpha-numeric character sets in lower and upper case letters 1-4 lines
	Font size	5, 7, 9, 12, 14, 16 and 24 points
	Character height	0.8 - 15 mm (depending on font, nozzle size, ink and material surface)
	Nozzle size	60 µm (50 or 70 µm optional)
	Temperature range	5 to 45°C, max. 90% relative humidity, non-condensing
	Interface connection	RS.232, ASCII characters, 9,600 or 38,400 baud
	Data input	PC user interface together with Metzner assembly machine or touch-screen as stand-alone device
	Head ventilation	optional
	Cleaning set	optional
	Dimensions (L x W x H)	440 x 280 x 480 mm
	Weight	22 kg
	Electrical connection	230 V 50/60 Hz