

METZNER ST-OB

All-rounder with particularly finely adjustable pressure




FEATURES

- Particularly precisely adjustable and very low pressure between the conveyor belts
- No squeezing of elastic materials
- Very exact cuts
- Available with tube cut, shear cut or punched cut
- Wide range of processing (cables, wires, strands, shrink tubes, labels and other materials)



A wide range of 100% compatible Metzner unwinders, feeders, winders, stackers and printers are available for the Metzner ST-OB.

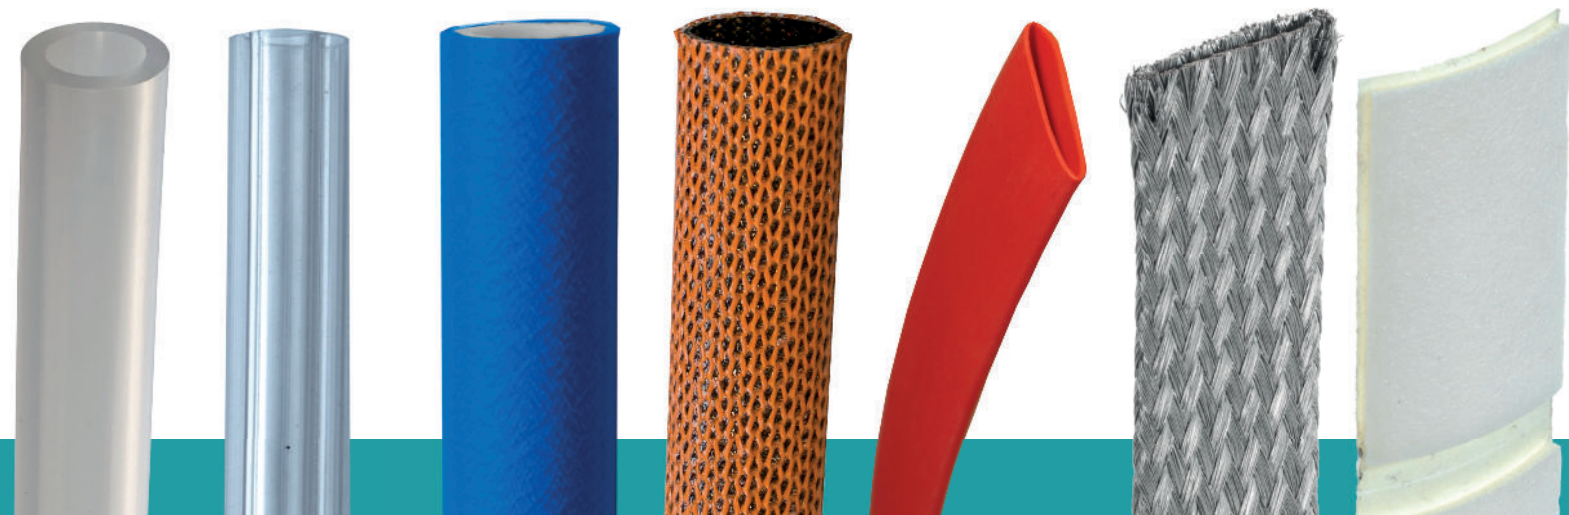

ALL TECHNICAL DETAILS AT A GLANCE

Performance data	ST-OB
Dimension of material: width max.	150 mm 65 mm
Dimension of material: height max.	20 mm 30 mm
Length interval	0.1 mm
Typical repeat accuracy	± (1mm + 0.2 % l)
Feeding speed max.	60 MPM
Cutting performance	150 cuts/min.
Available cutting technologies	ST-OB
Die cutting	✓
Shear cutting	✓
Draw cutting	✓
Blade cutting	✓
Hot cutting	–
Rotary cutting	–
Tools cutting	–
Drilling	–
Technical data	ST-OB
Dimensions (L x W x H)	700 mm x 400 mm x 650 mm
Electrical connection	230 V 50/60 Hz 10 A
Compressed air connection	6 bar
Weight	70 kg
Drive	Schneider
Display	5,7" touch screen (color)
Motor	3~stepper motor
Consumption kVA bar	P: 0.4 kVA approx. 150 l/min.
Noise (idle)	< 75dB (A)